


Collins F450V-60 #1  
526 9643 010 7239

5.79 kHz -3 db  
6.15 kHz -6 db  
16.40 kHz -60 db  
450.57 Center freq

Plotted by KK6IL 1-30-04

Data with 20K in/out - see page 2 for 100Kohm in/out response

434.21	-68
438.02	-67
439.81	-65
441.51	-60
442.52	-55
443.33	-50
444.59	-40
445.57	-30
446.28	-20
446.80	-10
447.01	-6
447.17	-3
447.23	-2
447.34	-1
447.68	-0.2
448.21	0
449.18	-1
450.29	0
451.27	-1
452.15	-0.3
452.73	-1
452.87	-2
452.96	-3
453.16	-6
453.37	-10
453.91	-20
454.60	-30
455.48	-40
456.59	-50
457.20	-55
457.91	-60
458.71	-65
459.77	-70
460.37	-71
461.57	-71.5

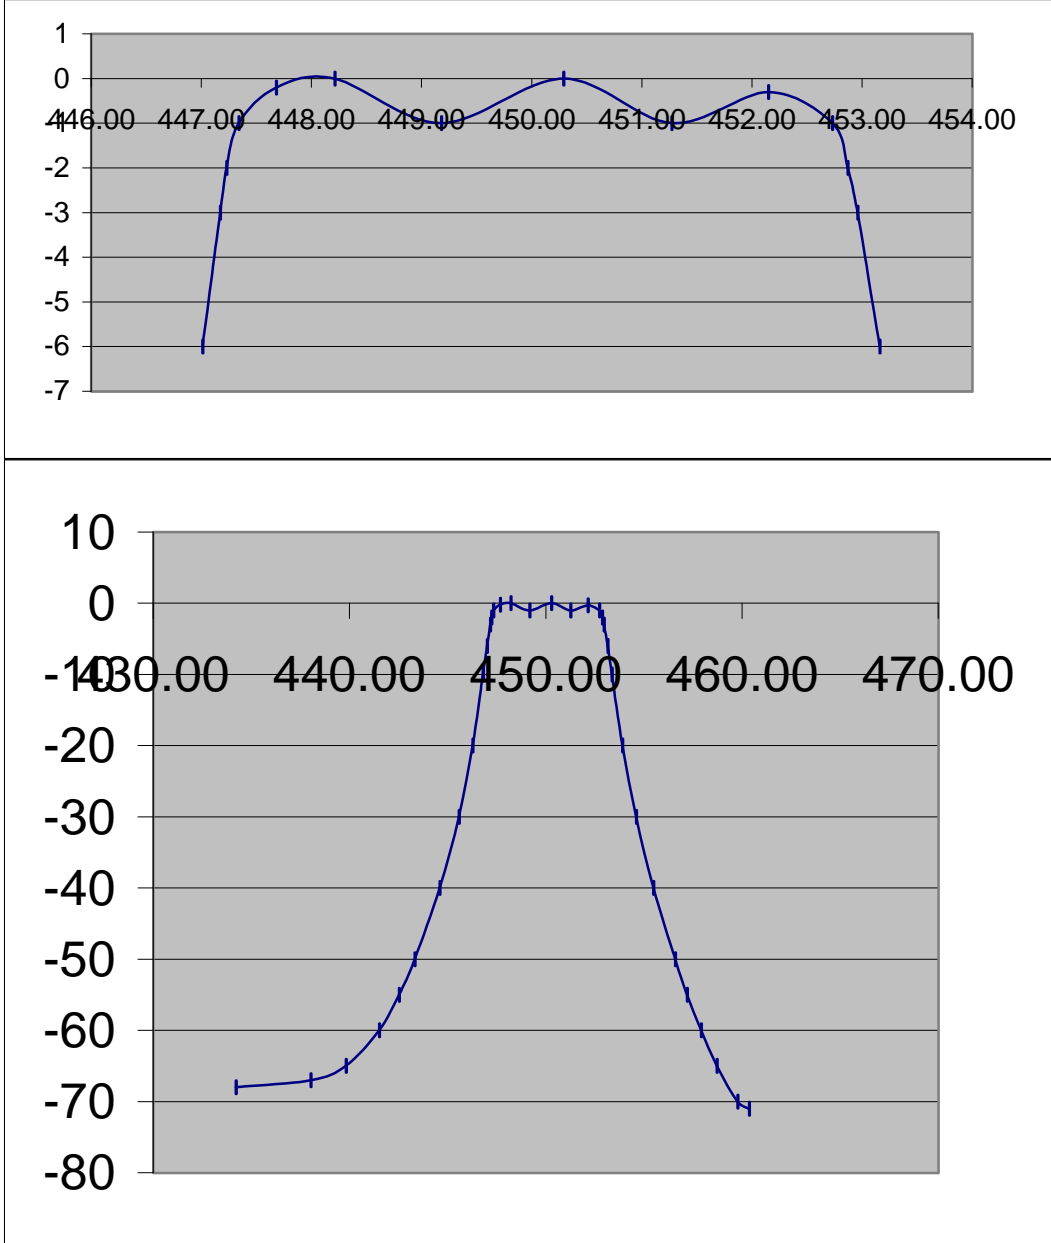

5.05 kHz -3 db  
5.68 kHz -6 db  
18.32 kHz -60 db

449.30 Center freq

Data taken with 100K in/out

424.75	-68
434.34	-67
437.24	-65
440.14	-60
441.43	-55
442.44	-50
444.04	-40
445.24	-30
446.14	-20
446.94	-10
447.23	-6
447.43	-3
447.53	-2
447.67	-1
448.00	0
448.54	-0.6
449.53	-0.1
450.08	-0.3
450.45	-0.7
451.47	0
451.95	-1
452.25	-2
452.48	-3
452.91	-6
453.29	-10
453.96	-20
454.81	-30
455.82	-40
457.08	-50
457.74	-55
458.46	-60
459.19	-65
460.08	-70
466.30	-68

